
Splice Plates

TS-SP · Joining & Fixings

وصلات الربط (سبلايس)

Side splice plates for straight joints, with hinged and adjustable versions for odd angles.

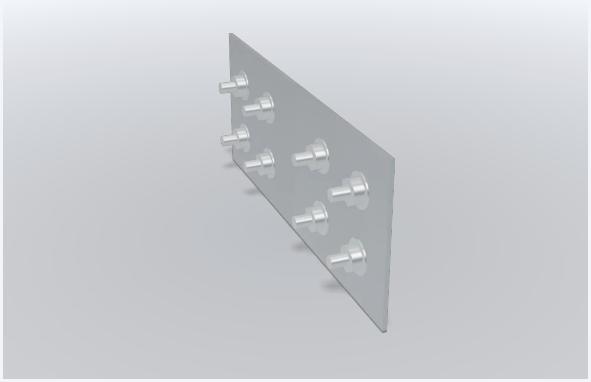

PRODUCT FAMILY	TS-SP
SIDE HEIGHTS H	50, 100 mm
THICKNESS T	1.5, 2.0 mm
STANDARD LENGTH	200 mm
MATERIAL	Same steel as tray
PERFORATION	8 × Ø7 mm
FINISHES	HDG PG SS

FEATURES

- Straight, hinged horizontal and hinged vertical
- Supplied with each tray length

SPECIFICATION

Product family	TS-SP
Side heights H	50, 100 mm
Thickness t	1.5, 2.0 mm
Standard length	200 mm
Material	Same steel as tray
Perforation	8 × Ø7 mm
Code format	TS-SP[S|H|V]-[H]-[finish]

FINISHES

Code	Finish	Coating / grade
HDG	Hot-dip galvanised after fabrication · جلفنة على الساخن بعد التصنيع	BS EN ISO 1461 — mean zinc ≥ 55 µm on steel 1.5–3 mm (≥ 45 µm below 1.5 mm)
PG	Pre-galvanised (Sendzimir) steel · صاج مجلفن مسبقاً (سندزمير)	EN 10346 DX51D+Z275 — 275 g/m² total, about 20 µm per side
SS	Stainless steel 316L · استانلس ستيل 316L	EN 10088-2 grade 1.4404 — marine, food and chemical areas

COMPATIBLE ACCESSORIES

TS-FS
Fastener Sets

INSTALLATION

- Fix supports first; add a support within 600 mm of each fitting.
- Keep splice joints near supports, away from mid-span.
- One splice plate each side, M6 round-head bolts, heads inside.
- Bond the run to earth where the project specification requires.

STANDARDS

- IEC 61537 (test reference)

LOAD DATA

Safe working loads and support spans will be published after type testing to IEC 61537. Until then, support spacing follows the project specification; our engineers can advise on typical spans for your cable load.

Preliminary datasheet for the TRUSTEEL launch range. Values may change before Rev A1; confirm with TRUSTEEL before ordering. Standards are listed as design and test references; compliance is claimed only where a test report is issued.